


LOG Antenna - UHF

LOG antena - UHF

P-18

- ✓ **Covers frequency range 470 - 862 MHz (Ch. 21-69).**
Pokriva frekvenčni pas 470 - 862 MHz (kanali 21-69).
- ✓ **Impedance 75 Ohm, antenna length 60 cm.**
Impedanca 75 Ohm, dolžina antene 60 cm.
- ✓ **Easy to install.**
Enostavna montaža.
- ✓ **Can be used for both horizontal and vertical (optional) polarization.**
Primerna za horizontalno in vertikalno (opcija) polarizacijo
- ✓ **Reliable and robust design for optimum performance and long life time.**
Zanesljiv in robusten dizajn za optimalno delovanje in dolgo življenjsko dobo.

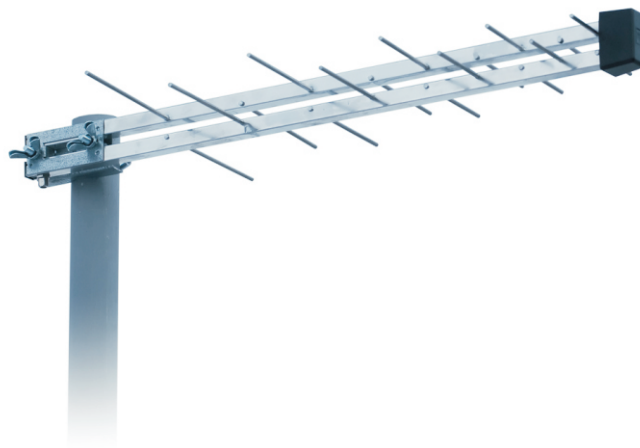

Type Tip	No. of elements Število elementov	Gain Dobitek	F/B ratio Razmerje napr.-naz.	Connection Priključek	Packing Pakiranje	
					pcs. kos	cm / m3 cm / m3
P-18 * P-18 F *	18	8 dB(i)	20 dB	- "F"	10	111x34x16 / 0,060
P-18 DTT/G ** P-18 G-SWITCH **		23 dB(i)		"F" "F"		


* **passive antenna with different connections**
pasivna antena z različnimi prikljopi:

- P-18** basic version without connector /
osnovna izvedba brez konektorja
- P-18 F** version with "F" connector /
izvedba z "F" konektorjem
- P-18 F H/V** H/V version / H/V izvedba
- P-18 FZ** FZ version / FZ izvedba



** **active antenna with built-in low-noise antenna amplifier**
aktivna antena z vgrajenim nizkošumnim ojačevalnikom:

- P-18 DTT/G** version with amplifier and "F" connector
izvedba z ojačevalnikom in "F" konektorjem
- P-18 G-SWITCH** version with amplifier with SWITCH system
and "F" connector / *izvedba z ojačevalnikom
s SWITCH sistemom in "F" konektorjem*

Amplifier type Tip ojačevalnika	Amplific. Ojačanje	Noise figure Šumno št.	Power supply Napajanje	Power supply source Vir napajanja
built-in antenna <i>vgrajen v anteni</i>	14 dB @ 5 VDC	2 dB	5-24 VDC	via coax. cable <i>preko koaks. kabla</i>
	16 dB @ 12-24 VDC		12mA @ 5 VDC 30mA @ 12-24 VDC	75 Ohm

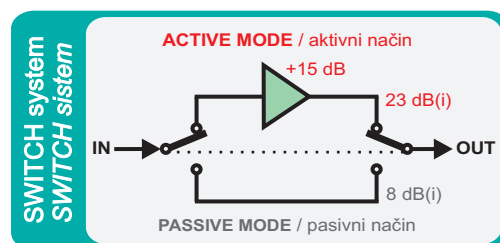

Recommended power supply / *poročamo napajalnik* : **SUR-211**

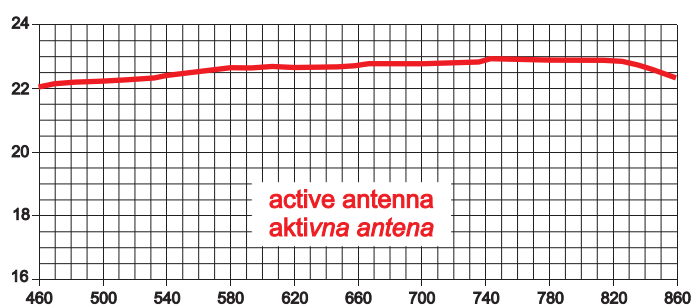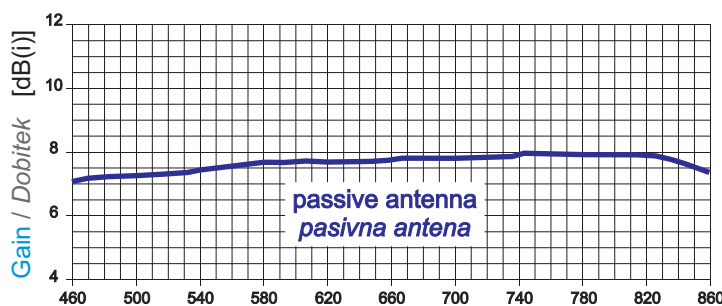

Frequency / Frekvenca [MHz]