


LOG Antenna - UHF

LOG antena - UHF

P-2845

- ✓ **Covers frequency range 470 - 862 MHz (Ch. 21-69).**
Pokriva frekvenčni pas 470 - 862 MHz (kanali 21-69).
- ✓ **Impedance 75 Ohm, antenna length 106 cm.**
Impedanca 75 Ohm, dolžina antene 106 cm.
- ✓ **Easy to install.**
Enostavna montaža.
- ✓ **Can be used for both horizontal and vertical (optional) polarization.**
Primerna za horizontalno in vertikalno (opcija) polarizacijo.
- ✓ **Reliable and robust design for optimum performance and long life time.**
Zanesljiv in robusten dizajn za optimalno delovanje in dolgo življenjsko dobo.

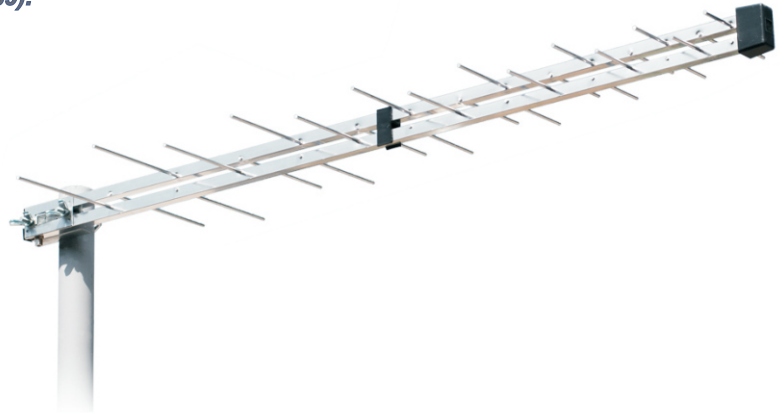

Type Tip	No. of elements Število elementov	Gain Dobitek	F/B ratio Razmerje napr.-naz.	Beam width Širina glav. lista	Connection Priključek	Packing Pakiranje	
						pcs. kos	cm / m3 cm / m3
P-2845 *	28	9,5 dB(i)	24 dB	H 35-45° V 55-46°	-	1	106x34,5x5,5 / 0,020
P-2845 F *					"F"	5	111x34x16 / 0,060
P-2845 DTT/G ** P-2845 G-SWITCH **		24,5 dB(i)			"F" "F"	10	111x34x27 / 0,102

*** passive antenna with different connections**

pasivna antena z različnimi prikljopi:


- P-2845** basic version without connector /
osnovna izvedba brez konektorja
- P-2845 F** version with "F" connector /
izvedba z "F" konektorjem
- P-2845 F H/V** H/V version / *H/V izvedba*
- P-2845 FZ** FZ version / *FZ izvedba*

**** active antenna with built-in low-noise antenna amplifier**



aktivna antena z vgrajenim nizkošumnim ojačevalnikom:

- P-2845 DTT/G** version with amplifier and "F" connector
izvedba z ojačevalnikom in "F" konektorjem
- P-2845 G-SWITCH** version with amplifier with SWITCH system
and "F" connector / *izvedba z ojačevalnikom s SWITCH sistemom in "F" konektorjem*

Amplifier type Tip ojačevalnika	Amplific. Ojačanje	Noise figure Šumno št.	Power supply Napajanje	Power supply source Vir napajanja
built-in antenna vgrajen v anteni	14 dB @ 5 VDC	2 dB	5-24 VDC	via coax. cable <i>preko koaks.kabla</i>
	16 dB @ 12-24 VDC		12mA @ 5 VDC 30mA @ 12-24 VDC	75 Ohm

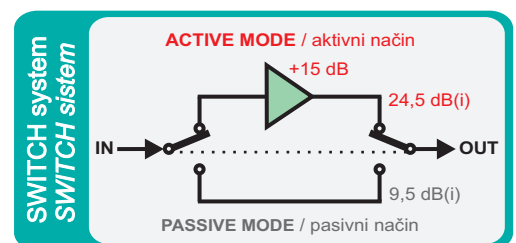

Recommended power supply / *poročamo napajalnik* : **SUR-211**

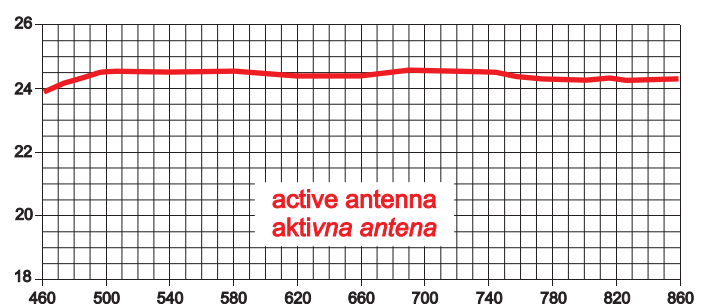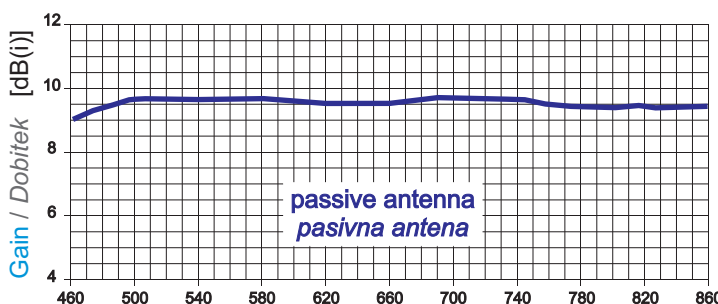

Frequency / Frekvenca [MHz]