




Multichannel headend Accessories

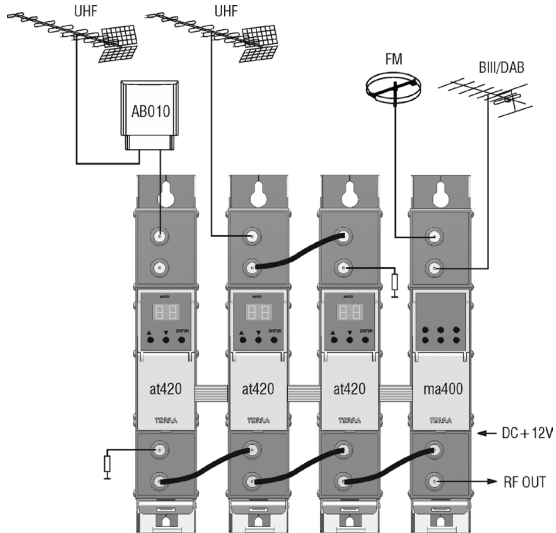

Power supply

- high efficiency 12 V & 1.25 A switch-mode power supply



Technical specifications	
T Y P E	GS15E-3P1J
Ordering number	00632
DC output	+12 V 1.25 A
Mains voltage	100 V ÷ 240 V ~ 50 Hz
Operating temperature range	0° ÷ +40° C
Dimensions/Weight (packed)	34x71x50 mm/0.18 kg

Installation example of filtering 6 TV channels from 2 directions & combining with FM and DAB signals.
DC power is distributed from single power supply by powering bus.

DIN rail power supply

Technical specifications	
T Y P E	DR-60-12
Ordering number	00630
DC output	+12 V 4.5 A
Mains voltage	100 V ÷ 240 V ~ 50 Hz
Operating temperature range	-20° ÷ +50° C
Dimensions/Weight (packed)	78x97x56 mm/0.4 kg



- DC distribution cable for 4 modules 699.20
Ordering number 21875



- 19" system mountable rack
Ordering number 01957



- Female - Female quick coaxial bridge 699.026
Ordering number 21876



- Rail for wall mounting, 1 meter, 699.027
Ordering number 21877

